

Eastern Railway High School, Asansol

359, G.T. Road, Asansol – 713301, Paschim Bardhaman

Date :19.01.2023


Sub :Proposal for calling quotation for construction of a New Toilet Complex for Girls and Ladies staff at Eastern Railway High School, Asansol

Quotation form in connection with the above work is enclosed herewith. Please quote your rate against the items of the quotation and submit in a sealed cover to this office by 14:00 hrs on 29/01/2023 and the same will be opened on the same date by 16:00 hrs.

Yours faithfully,


17.01.2023
Headmaster

Eastern Railway High School,
Asansol

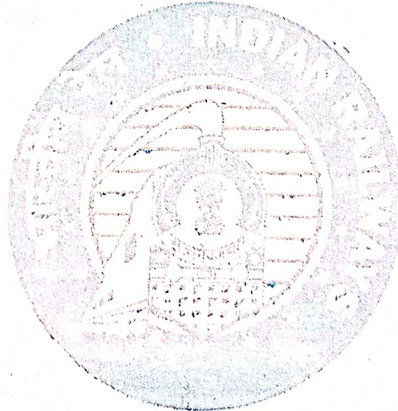

SCHEDULE FOR QUOTATION

Sl No.	Description of Items	Only one rate to be quoted(unit)		Offer rate (in figures)	Offer Rate (In work)
1.	Overall percentage Above / Below / At Par rate of all items covered in Schedule B . Total Basic Cost = Rs 9,99,662 /- (Rupees Nine Lakhs, Ninety Nine Thousand, Six Hundred and Sixty Two only). (Break-up cost attached in Annexure -A) only	%	Above/ Below/ At Par		

Special conditions :

1. Completion of work time : 3 months after getting the work order
2. Payment option : Through cheque after completion of whole work
3. Security deposit money before starting the work :05 %of the successful bid
4. Supervision of work : Headmaster of the school
5. Bidders need to submit all documents including GST Certificate, EPF, EPIC, PAN, Registration etc.
6. Compliance of all labour laws, payment of wage, act of minimum wage laws and all others standards rules of building construction
- 7 Administration reserves the right to assess capabilities and capacities to perform the contract . If it is found unsatisfactory of works administration reserves the right to reject the work of tender .
8. Others terms and conditions laid down in GCC-2022 of Eastern Railway may be complied .

Quotationer's signature

**Proposal for Quotation of New Toilet Complex for Ladies Student and staff at Eastern
Railway High School under SSE/W/E/ASN (SCHEDULE-B) - ITEMS C**

USSOR -

Sl. No.	Description of Work	Quantity	Rate (Rs.)	Unit	Amount (Rs.)	Remarks
SCHEDULE - A						
1	Supplying and fitting brass neck CL-823 CP pillar cock for hot water or DISHWASHER similar brand including all labour and material cost complete in all respect as per EIC.	3.00	1122.40	1.00	each	6167.38 Rate vide Accept. Letter no. O-AC-T-291-18-10059724002010588 dtd. 08.06.20
2	Supplying fitting and fixing Corral two way angular cock of Paryware brand or similar of model no G402A1 complete in all respect as per EIC.	6.00	1500.82	1.00	each	9004.92
3	Supplying fitting and fixing bib cock of Paryware brand or similar of model no G404A1 or similar complete in all respect as per EIC.	8.00	930.09	1.00	each	6580.64
4	Supplying fitting and fixing angular stop cock Paryware brand or similar of model no G4853A1 or similar complete in all respect as per EIC.	18.00	889.18	1.00	each	16005.24
5	Supplying fitting and fixing wash basin of Hindware delta cat no 10010 or similar with all labour and material cost complete in all respect as per EIC.	3.00	1903.73	1.00	each	5711.19
6	Supplying fitting and fixing pedestal of wash basin of Hindware brand or similar with all labour and material cost complete in all respect as per EIC.	3.00	2794.22	1.00	each	8382.66
7	Supplying fitting and fixing W.C pan Indian type (Onesal) of Paryware brand of model no C0117 or similar with all labour and material cost complete in all respect as per EIC.	1.00	2972.98	1.00	each	2972.98
8	Supplying fitting and fixing W.C pan European type of Hindware brand of Cat no 20011 or similar with all labour and material cost complete in all respect as per EIC.	2.00	3259.32	1.00	each	6518.64
9	Providing and fixing of Sintex Safe Series door leaves to match with frame of approved colour and design as per EIC. The rate includes all materials, labour cost for fitting fixing including supplying and fixing of door bolts, handle with all lead etc. complete in all respect.	8.00	6630.50	1.00	each	53044.00
10	Supplying fitting and fixing squatting urinal of Paryware brand of model no Cu503 or similar with all labour and material cost complete in all respect as per EIC.	2.00	2530.00	1.00	each	5060.00
11	Making board by providing 4 mm th ACP top pasting with waterproofing with sticker laminating etc. as require as per higher authority complete in all respect as per EIC.	1.00	5348.73	1.00	sqm	5348.73
Total Schedule - A					123396.26	
SCHEDULE - B						
1	Excavate work in any form of soil	45.00	88.16	1.00	m ³	3967.20
2	Excavate E.M. in building work	45.00	9.20	1.00	m ³	414.00
3	Excavating after footing (below G.L.)	20.00	20.40	1.00	m ³	408.00
4	Back filling	120.00	171.16	1.00	m ³	20539.20
5	RCC (M 20) up to plinth	1.00	359.67	1.00	m ³	359.67
6	RCC (M 20) above plinth	10.00	2732.49	1.00	m ³	27324.90
7	RCC (M 20) precast	11.00	3004.22	1.00	m ³	33046.42
8	Shuttering for RCC work for lintel beam etc. etc.	0.50	3223.38	1.00	m ²	1611.69
9	Shuttering for RCC work for roof etc.	40.00	206.55	1.00	sqm	8262.00
10	Shuttering for RCC work for column etc.	40.00	234.36	1.00	sqm	9374.40
11	Shuttering for RCC work for column footing etc.	32.00	297.00	1.00	sqm	9504.00
12	RCC (M 15) cast in position	10.00	145.90	1.00	sqm	1459.00
13	C.C. (1:2:4) cast in situ	4.00	2325.34	1.00	m ³	9301.36
14	Backfilling 4 up to plinth	0.50	2325.34	1.00	cum	15114.71
15	Backfilling 4 up to plinth	15.00	2206.10	1.00	m ³	33091.50
16	Extra 15% work above 5cm (1:4)	25.00	2206.10	1.00	m ³	55152.50
17	Extra 15% work above 5cm (1:4)	22.00	15.88	1.00	m ³	3343.78
18	Extra 15% work above 5cm (1:4)	00.00	265.31	1.00	m ³	15918.60
19	12 mm thick DCP (1:4)	50.00	42.15	1.00	m ²	2107.50
20	12 mm thick DCP (1:4)	350.00	62.44	1.00	m ²	21854.00

21	6 mm thick extra plaster (1:3)	35.00	69.56	1.00	m ²	2000.18	111151 (p-125)
22	12 mm thick SCP (1:3)	55.00	78.37	1.00	m ²	4310.35	111080 (p-124)
23	Providing and fixing vitrified tiles	30.00	1102.32	1.00	sqm	33000.60	099026/p-86
24	S&F vitrified electrical tiles (300mm x 50mm and above)	45.00	745.00	1.00	m ²	33525.00	099013 (p-85)
25	Supplying Cement PPC	18.50	0842.50	1.00	MT	126808.25	252050/p-271
26	Supplying H.D. reinforcement for RCC work	2000.00	80.86	1.00	kg	198726.00	045014/p-22
27	Graveling with snow cam exterior	100.00	41.36	1.00	m ²	4176.00	116110 (p-129)
28	Applying cement primer	100.00	25.10	1.00	m ²	2516.00	115090/p-128
29	Finishing wall with Acrylic Smooth exterior paint	110.00	83.46	1.00	m ²	9182.80	115180/p-129
30	Decorating of wall (2 coats)	100.00	63.25	1.00	m ²	6229.00	115042 (p-128)
31	Plastering of parash in wall	100.00	76.54	1.00	m ²	7654.00	112040/p-125
32	Graveling/finishing rubbles etc.	60.00	41.23	1.00	cum	2473.60	21070/p-
33	Transporting rubbles etc.	30.00	106.60	1.00	cum	3186.00	21090/p-
34	Painting iron work (synthetic enamel paint two coats)	8.00	47.65	1.00	m ²	381.20	121170 (p-134)
35	S & F PVC ball pipe, 110 mm dia	50.00	285.15	1.00	each	13305.50	154010/p-187
36	S & F clamp for 100 dia pvc pipe	72.00	82.84	1.00	each	650.48	154020/p-188
37	S&F PVC bend with door 110 mm dia	10.00	124.13	1.00	each	1241.30	154110/p-189
38	S & F 110 dia RW PVC bend	10.00	124.13	1.00	each	1241.30	154110/p-189
39	Dismantling brick work 60m load.	2.00	378.50	1.00	m ³	757.00	182013 (p-226)
40	Reinforcement	1.00	448.29	1.00	cum	448.29	181020/226
41	Structural steel work welded	50.00	100.34	1.00	kg	5017.00	081031/p-72
42	Fixing and fixing Aluminium Frame for partition wall for fixed portion.	25.00	494.56	1.00	kg	12384.00	082011/p-77
43	Providing and fixing 4.0 mm th glass panes in aluminium window	4.00	907.38	1.00	sqm	3820.44	082011/p-77
44	Supplying misc. G.I pipe fittings	15.00	132.25	1.00	kg	1983.75	153350/p-185
45	S & F PPR gate valve 32 dia.	2.00	649.58	1.00	each	1299.16	131182/p-143
46	S & F PPR gate valve 25 mm dia	2.00	575.20	1.00	each	1150.40	131181/p-143
47	S & F extension 25 mm dia PTMT	2.00	69.75	1.00	each	139.50	134112/p-155
48	S&F PTMT ball cock 15 mm dia	4.00	121.21	1.00	each	484.84	133360/p-165
49	S&F PTMT angular stop cock 15 mm dia	4.00	171.19	1.00	each	684.76	134070/p-154
50	S & F PTMT Ball valve 25 mm dia	2.00	571.74	1.00	each	1143.48	134053/p-154
51	S&F C.P. soap dish	6.00	167.28	1.00	each	943.68	134070/p-154
52	S&F 15 mm dia stop cock PTMT	4.00	140.81	1.00	m	562.44	134024/p-154
53	S & F CPVC pipe 20 MM	30.00	198.40	1.00	m	5952.00	131092/p-141
54	S & F CPVC pipe 12 MM	18.00	291.95	1.00	m	5255.10	131094/p-141
55	S & F CPVC pipe 50 mm dia	12.00	503.38	1.00	m	6040.56	131106/p-142
56	S&F meter 600 x 150 mm of 5.5 mm th	4.00	850.23	1.00	each	3400.92	152110/p-179
57	Making connection with main line 50 to 80 mm dia	1.00	809.47	1.00	each	809.47	151020/228
58	Supplying fly proof mesh	4.00	367.38	1.00	sqm	1469.44	253030/p-278
59	P & F waste coupling 32 mm	4.00	130.38	1.00	each	521.44	153531/p-168
60	P & F C.P. connector pipe 15 mm	15.00	246.48	1.00	each	3697.20	132161/p-145
61	Providing and fixing P.V.C. low level flushing cistern	4.00	917.23	1.00	each	3699.16	151181/p-177
62	S&F C.P. gratings 100 mm dia	4.00	123.82	1.00	each	495.28	153471/p-166
63	S&F C.P. hand shower	4.00	421.31	1.00	each	1685.24	153510/p-187
64	Providing and fixing PTMT liquid soap container	3.00	178.09	1.00	each	534.27	153300/p-185
65	Providing and fixing brass robe hook swinging type with 3 hooks	6.00	119.18	1.00	each	715.08	155110/p-191
66	Supplying and fixing approved quality chromium plated shirt hooks (One box of 4 hooks)	4.00	101.73	1.00	each	406.92	155240/p-192
67	Providing and fixing Towel rail (C.P.) brass 16mm dia x 450mm long	2.00	302.48	1.00	each	604.96	153400/p-189
68	Trimming unwanted branches of trees upto 2.0 m height	15.00	38.39	1.00	each	575.85	151640/p-
69	Trimming unwanted branches of trees above 2.0 m height	15.00	57.51	1.00	each	864.15	151650/p-199
Total Amount						730221.95	
Add escalation 20% over Schedule - B						146044.39	
Total Amount Schedule - B						876266.34	
Total Schedule - A + Schedule - B						999662.60	

Quotation's Signature